


LIR2025


Brief Datasheet

Lithium Ion Battery

1 Dimension

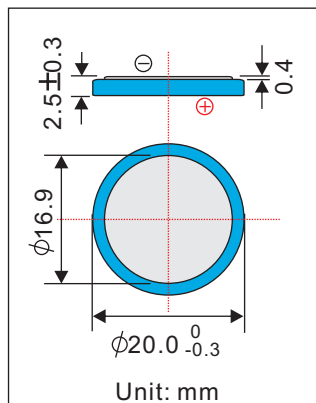



3 Electrical Characteristics

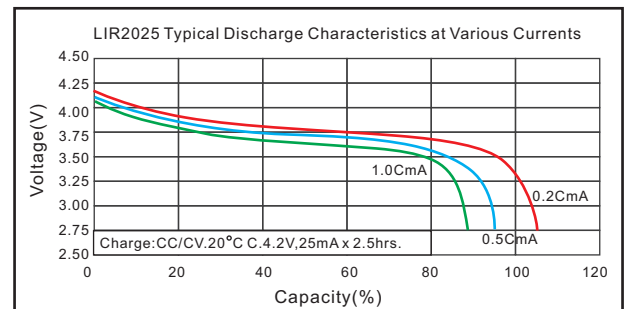

2 Basic Specification

Nominal Voltage	3.6V	
Nominal Capacity	Typical	25mAh
	Minimum	20mAh
Charge method	CC/CV (Constant Current-Constant Voltage) current: 0.5C Voltage: 4.2V End current: 0.02C	
Charging Voltage	4.20V	
Charging Std. Current	0.5C	
Max Current	Charge	1C
	Discharge	2C
Ambient Temperature	Std. Charge	-20°C to 45°C
	Discharge	-20°C to 60°C
	Storage	15 °C to 25 °C
Discharge cut-off voltage	2.75V	
Internal Impedance	≤1000mΩ	
Cycle life	>500cycles(≥80% capacity)	
Nominal Weight	Approx. 2.5g	

*1C = 1 Capacity

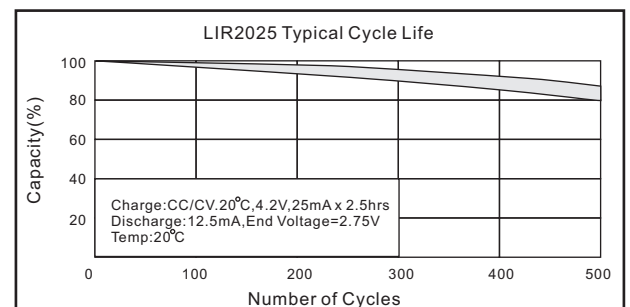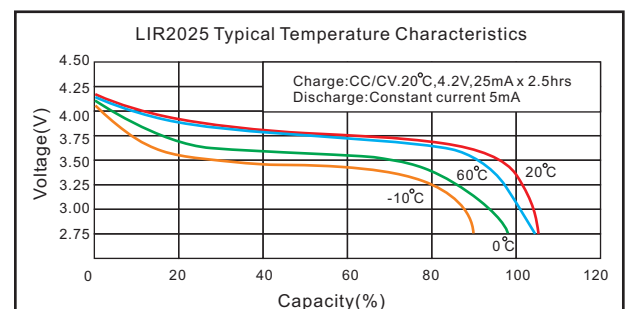

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.