

# EEMB CO., LTD

## Polymer Li-ion Battery

### Specification

**Model: LP504765**

**Capacity: 1600mAh**

|          |         |          |
|----------|---------|----------|
| Prepared | Checked | Approved |
|          |         |          |

Customer:

Customer Approval (Customer confirmation) :

|           |         |          |
|-----------|---------|----------|
|           |         |          |
| Signature | Checked | Approved |
|           |         |          |

Address: Room ABCD,25/F, Block A, Fortune Plaza, NO.7060 Shennan Road Shenzhen, China

Postal code: 518040

Phone: 0086-755-83022275

FAX: 0086-755-83021966

<http://www.eemb.com>

| Document Name             | Document No.     | Ver | Date       | Page |
|---------------------------|------------------|-----|------------|------|
| LP504765<br>Specification | ZJQM-RD-SPC-2348 | 0.0 | 2013-10-31 | 2/6  |

## Catalog

| Chapter | Content  | Page |
|---------|--|------|
| 0       | Catalog.....                                   | 2    |
| 1       | Scope.....                                     | 3    |
| 2       | Product Basic Characteristics.....             | 3    |
| 2.1     | Model.....                                     | 3    |
| 2.2     | Capacity.....                                  | 3    |
| 2.3     | Nominal Voltage.....                           | 3    |
| 2.4     | Weight.....                                    | 3    |
| 2.5     | Internal Impedance.....                        | 3    |
| 2.6     | Dimension.....                                 | 3    |
| 2.7     | Charge.....                                    | 3    |
| 2.8     | Discharge.....                                 | 3    |
| 2.9     | Operation Temperature.....                     | 3    |
| 2.10    | Storage Temperature.....                       | 3    |
| 2.11    | Storage Relative Humidity.....                 | 3    |
| 3       | Shape and Dimensions.....                      | 3    |
| 4       | Appearance.....                                | 3    |
| 5       | Specification.....                             | 4    |
| 5.1     | Electrical Characteristics.....                | 4    |
| 5.1.1   | 1C <sub>5</sub> A rate discharge capacity..... | 4    |
| 5.1.2   | High temp. discharge capacity.....             | 4    |
| 5.1.3   | Low temp. discharge capacity.....              | 4    |
| 5.1.4   | Cycle Life.....                                | 4    |
| 5.1.5   | Capacity Retention.....                        | 4    |
| 5.2     | Acclimatization Characteristics.....           | 4    |
| 5.2.1   | High Temp. and High Humidity .....             | 4    |
| 5.2.2   | Vibration .....                                | 4    |
| 5.2.3   | Drop.....                                      | 4    |
| 5.3     | Safety Characteristics.....                    | 5    |
| 5.3.1   | Overcharge.....                                | 5    |
| 5.3.2   | Short-Circuit.....                             | 5    |
| 5.3.3   | Heating.....                                   | 5    |
| 6       | Battery shipment voltage.....                  | 5    |
| 7       | Matters needing attention.....                 | 5-6  |

| Document Name             | Document No.     | Ver | Date       | Page |
|---------------------------|------------------|-----|------------|------|
| LP504765<br>Specification | ZJQM-RD-SPC-2348 | 0.0 | 2013-10-31 | 3/6  |

## 1. Scope


This product specification defines the requirements of the rechargeable polymer lithium-ion battery supplied to the customer by EEMB Co., Ltd.

## 2. Product Basic Characteristics

| No.  | Item                      |                  | Characteristics |     | Remark                      |
|------|---------------------------|------------------|-----------------|-----|-----------------------------|
| 2.1  | Model                     |                  | LP504765        |     |                             |
| 2.2  | Capacity                  | Nominal Capacity | 1600            | mAh | 0.2C <sub>5</sub> A         |
|      |                           | Minimum          | 1500            | mAh | 0.2C <sub>5</sub> A         |
| 2.3  | Nominal Voltage           |                  | 3.7             | V   |                             |
| 2.4  | Weight                    |                  | Approx.32       | g   |                             |
| 2.5  | Internal Impedance        |                  | ≤ 100           | mΩ  | AC 1KHz(50% charge)         |
| 2.6  | Dimension                 | Length           | ≤ 66            | mm  |                             |
|      |                           | Width            | ≤ 47.5          | mm  |                             |
|      |                           | Thickness        | ≤ 5.3           | mm  |                             |
| 2.7  | Charge                    | Maximum Current  | 1600            | mA  | 1.0C <sub>5</sub> A (CC&CV) |
|      |                           | Limited Voltage  | 4.200±0.020     | V   |                             |
|      |                           | End-of Current   | 32              | mA  |                             |
| 2.8  | Discharge                 | Maximum Current  | 3200            | mA  | 2.0C <sub>5</sub> A         |
|      |                           | End Voltage      | 2.750±0.005     | V   |                             |
| 2.9  | Operation Temperature     | Charge           | 0 ~ 45          | °C  |                             |
|      |                           | Discharge        | -20 ~ +60       | °C  |                             |
| 2.10 | Storage Temperature       | 1 month          | -20 ~ +60       | °C  |                             |
|      |                           | 3 month          | -20 ~ +45       | °C  |                             |
|      |                           | 12 month         | -20 ~ +25       | °C  |                             |
| 2.11 | Storage Relative Humidity |                  | 65±20           | %   |                             |

## 3. Shape and Dimensions (Unit: mm)

| Item | Specification |
|------|---------------|
| T    | Max5.3        |
| W    | Max47.5       |
| L    | Max66         |
| L1   | Max67         |
| L2   | 10±1          |
| M    | 30±1          |
| N    | 4±0.5         |

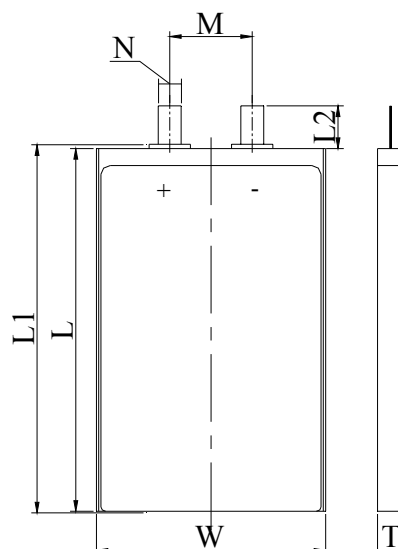

#### 4. Appearance

It shall be free from any defects such as remarkable scratches, breaks, cracks, discoloration, leakage, or middle deformation.

#### 5. Specification

##### 5.1 Electrical Characteristics

| No.   | Item                                      | Criteria                    | Test Instructions   |
|-------|---|-----------------------------|---|
| 5.1.1 | 1C <sub>5</sub> A rate discharge capacity | Discharge Time $\geq$ 57min | Full charge at 20 $\pm$ 5 $^{\circ}$ C, rest for 30 min, then discharge at the same temperature with 1.0C <sub>5</sub> A to 2.75V.  |
| 5.1.2 | High temp. discharge capacity             | Discharge Time $\geq$ 54min | Full charge at 20 $\pm$ 5 $^{\circ}$ C, store at 55 $\pm$ 2 $^{\circ}$ C for 2h, then discharge at the same temperature with 1.0C <sub>5</sub> A to 2.75V.  |
| 5.1.3 | Low temp. discharge capacity              | Discharge Time $\geq$ 4.25h | Full charge at 20 $\pm$ 5 $^{\circ}$ C, store at -20 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C for 16h~24h, then discharge at the same temperature with 0.2C <sub>5</sub> A to 2.75V  |
| 5.1.4 | Cycle Life                                | $\geq$ 300Cycles            | After full charge, rest for 10 min, discharge at constant current of 1.0C <sub>5</sub> A to 2.75V. Batteries are full charge after 10 minutes.Repeat above steps until the two consecutive cycles of discharge time is less than 48 min |
| 5.1.5 | Capacity Retention                        | Discharge Time $\geq$ 4.5 h | After full charge, store at 20 $\pm$ 5 $^{\circ}$ C for 28 days. Then discharge with 0.2C <sub>5</sub> A to 2.75V   |

##### 5.2 Acclimatization Characteristics

| No.   | Item                         | Criteria  | Test Instructions   |
|-------|------------------------------|---|---|
| 5.2.1 | High Temp. and High Humidity | No deformation, no rust, no fire or explosion;<br>Discharge time $\geq$ 36min | After full charge, store at 40 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C (90%~95%RH) for 48h. After test, place at 20 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C for 2h and then discharge with 1C <sub>5</sub> A to end-voltage |
| 5.2.2 | Vibration                    | No deformation, leakage, no fire or explosion;<br>Battery Voltage $\geq$ 3.6V | Batteries are vibrated 30 min in three mutually perpendicular directions with amplitude of 0.38mm (10~30Hz) or 0.19mm (30~55Hz) and the scanning rate of 1oct per min   |
| 5.2.3 | Drop                         | No leakage, no fire or explosion;<br>Discharge Time $\geq$ 51 min             | Batteries are dropped onto a hard board with the thickness of 18~20mm from at least 1meter height. Drop the batteries from six different directions and discharge them at 1C <sub>5</sub> A to end-voltage.     |

### 5.3 Safety Characteristics

| No.   | Item          | Criteria   | Test Instructions  |
|-------|---------------|--|--|
| 5.3.1 | Overcharge    | No fire or explosion                                   | Put the batteries with thermocouple into the ventilation cabinet. Connect the polarities to constant voltage and adjust the current to 3CA, voltage to 4.8V. Charged the cells at 3C <sub>5</sub> A current 20±5℃ with a voltage limit of 4.8V and Current approach 0 A.                 |
| 5.3.2 | Short-Circuit | No fire or explosion;<br>The maximum Temperature: 150℃ | Put the batteries with thermocouple into the ventilation cabinet. Batteries are short-circuited by connecting the positive and negative terminals for 1h with a resistance load of 100mΩ. Watch the changes of temperature. Test the temperature of the batteries until it drops to 10℃. |
| 5.3.3 | Heating       | No fire or explosion                                   | Cell is heated in a circulating air oven at a rate of (5±2)℃ per minute to 130℃, and then placed for 30 minutes at 130℃  |

Note: Unless otherwise specified, all tests stated in this specification are conducted at the following conditions: Temp. : 20±5℃; Relative Humidity: 25%~85%.

### 6. Battery shipment voltage: 3.83~3.9V

### 7. Matters needing attention

Strictly observes the following needing attention. EEMB will not be responsible for any accident occurred by handling outside of the precautions in this specification.

#### **! Danger**

- Strictly prohibits heat or throw cell into fire.
- Strictly prohibits throw and wet cell in liquid such as water、 gasoline or drink etc.
- Strictly prohibits use leave cell close to fire or inside of a car where temperature may be above 60℃. Also do not charge / discharge in such conditions.
- Strictly prohibits put batteries in your pockets or a bag together with metal objects such as necklaces. Hairpins, coins, or screws. Do not store or transportation batteries with such objects.
- Strictly prohibits short circuit the (+) and (-) terminals with other metals.
- Do not place Cell in a device with the (+) and (-) in the wrong way around.
- Strictly prohibits pierce Cell with a sharp object such as a needle.
- Strictly prohibits disassemble or modify the cell.
- Strictly prohibits welding a cell directly.
- Do not use a Cell with serious scar or deformation.
- Thoroughly read the user's manual before use, inaccurate handling of lithium ion rechargeable cell may cause leakage, heat, smoke, an explosion, or fire, capacity decreasing.

#### **! Warning**

- Strictly prohibits put cell into a microware oven, dryer, or high-pressure container.
- Strictly prohibits use cell with dry cells and other primary batteries, or new and old battery or batteries of a different package, type, or brand.

| Document Name             | Document No.     | Ver | Date       | Page |
|---------------------------|------------------|-----|------------|------|
| LP504765<br>Specification | ZJQM-RD-SPC-2348 | 0.0 | 2013-10-31 | 6/6  |

- Stop charging the Cell if charging is not completed within the specified time.
- Stop using the Cell if abnormal heat, odor, discoloration, deformation or abnormal condition is detected during use, charge, or storage.
- Keep away from fire immediately when leakage or foul odor is detected.
- If liquid leaks onto your skin or clothes, wash well with fresh water immediately.
- If liquid leaking from the Cell gets into your eyes, do not rub your eyes. Wash them well with clean edible oil and go to see a doctor immediately.

### **! Caution**

- Before using the Cell, be sure to read the user's manual and cautions on handling thoroughly.
- Charging with specific charger according to product specification. Charge with CC/CV method. Strictly prohibits reversed charging. Connect cell reverse will not charge the cell. At the same time, it will reduce the charge-discharge characteristics and safety characteristics; this will lead to product heat and leakage.
- Store batteries out of reach of children so that they are not accidentally swallowed.
- If younger children use the Cell, their guardians should explain the proper handling.
- Before using the Cell, be sure to read the user's manual and cautions on handling thoroughly.
- Batteries have life cycles. If the time that the Cell powers equipment becomes much shorter than usual, the Cell life is at an end. Replace the Cell with a new same one.
- When not using Cell for an extended period, remove it from the equipment and store in a place with low humidity and low temperature.
- While the Cell pack is charged, used and stored, keep it away from objects or materials with static electric charges.
- If the terminals of the Cell become dirty, wipe with a dry cloth before using the Cell.
- Storage the cell in storage temperature range as the specifications. After full discharged, we suggest that charging to 3.7~4.0V with no using for a long time.
- Do not exceed these ranges of the following temperature ranges:
  - Charge temperature range : 0°C to 45°C;
  - Discharge temperature range : -20°C to 60°C.
  - Store less than 1 month : -20°C - +60°C
  - Store less than 3 months : -20°C - +45°C
  - Store less than 1 year : -20°C - +25°C

### **! Special Notice**

Keep the cell in **50% charged state** during long period storage. We recommend to charge the battery up to 50% of the total capacity every 3 months after receipt of the battery and maintain the voltage 3.7~4.0V. And store the battery in cool and dry place.