



# LIR10440 Lithium Ion Battery

## Brief Datasheet

### 1 Dimension

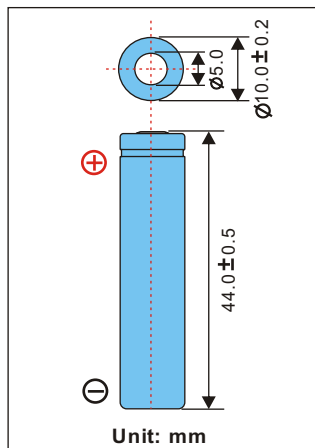



### 3 Electrical Characteristics

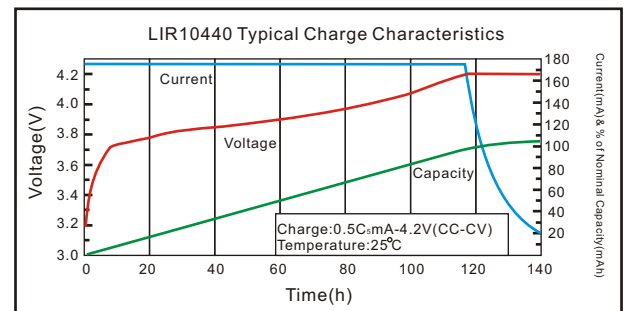

### 2 Basic Specification

Nominal Voltage		3.7V
Nominal Capacity	Typical	300mAh (0.2C discharge)
	Minimum	250mAh (0.2C discharge)
Charge method		CC/CV (Constant Current-Constant Voltage) current: 0.5C Voltage: 4.2V End current: 6mA
Charging Voltage		4.20V±0.05V
Charging Std. Current		150mA
Max Current	Charge	300mA
	Discharge	600mA
Ambient Temperature	Std. Charge	0°C to 45°C
	Discharge	-20°C to 60°C
	Storage	-5°C to 35°C
Discharge cut-off voltage		2.75V
Internal Impedance		≤110 mΩ
Cycle life		≥300cycles(≥80% capacity)
Nominal Weight		Approx. 12g

Note: \*1C = 1 Capacity

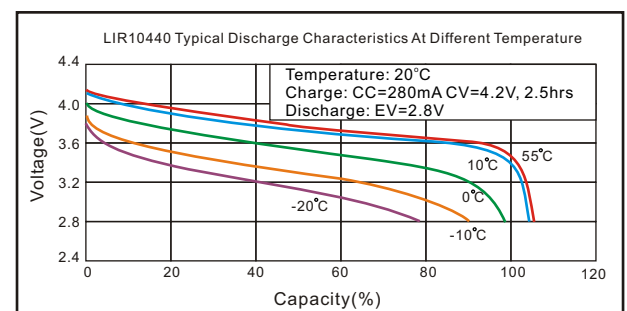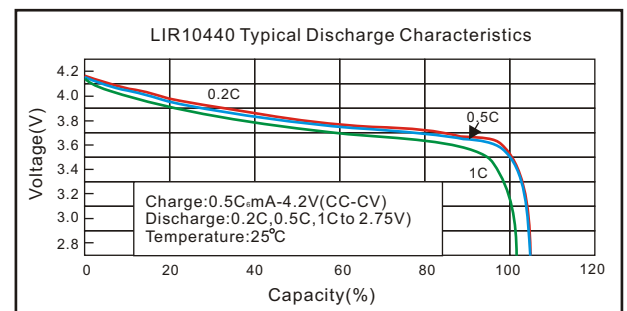

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.